


## HyperDeck Studio Mini



HyperDeck Studio Mini is a portable broadcast quality deck that records ProRes onto commonly available SD cards. You get 6G-SDI for recording all formats up to 2160p30, dual SD card slots for non-stop recording, a built in LCD screen and familiar VTR style front panel controls, all in a design that can be used on a desktop or in  $\frac{1}{3}$  of a standard rack space! HyperDeck Studio Mini also features 720p and 1080p 4:4:4 file support with fill and key outputs so it can be used as a source to provide broadcast graphics to live production switchers for downstream keying over live video!

### Connections

#### SDI Video Inputs

1

#### SDI Video Outputs

2

#### SDI Rates

270Mb, 1.5G-SDI, 3G-SDI, 6G-SDI

#### HDMI Video Outputs

1 x HDMI type A connector.

#### Power over Ethernet

1 x Ethernet with Power over Ethernet

#### Analog Video Inputs

None.

#### Analog Video Outputs

None.

#### Analog Audio Inputs

None, embedded audio only.

#### Analog Audio Outputs

None, embedded audio only.

#### Timecode connection

None.

#### SDI Audio Inputs

16 channels embedded in SD and HD in QuickTime files.

#### SDI Audio Outputs

16 channels embedded in SD and HD in QuickTime files.

#### HDMI Audio Inputs

None.

#### HDMI Audio Outputs

8 channels embedded in SD, HD and UHD in QuickTime files.

#### Reference Input

Tri-Sync or Black Burst.


#### Reference Generator

Tri-Sync or Black Burst.

#### Computer Interface

1 x USB 2.0 type C for software updates and HyperDeck Utility software control.

Please refer to either the Manual or the Information Note at [www.blackmagicdesign.com/support](http://www.blackmagicdesign.com/support) for compatible media.

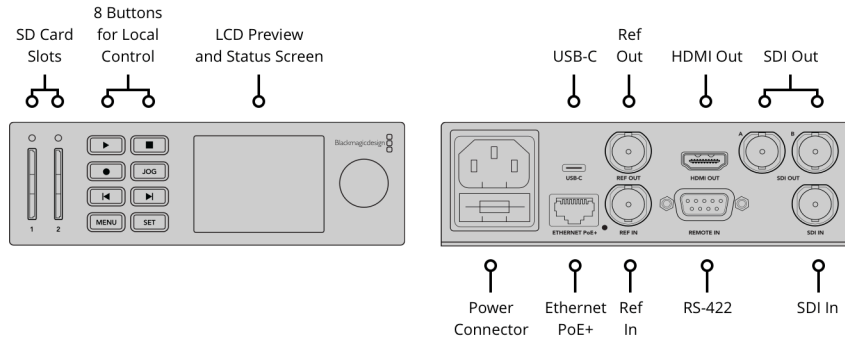

## Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080PsF23.98, 1080PsF24,  
 1080PsF25, 1080PsF29.97, 1080PsF30  
 1080i50, 1080i59.94, 1080i60

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30

### SDI Compliance

SMPTE 259M, 292M, 296M and 425M

### SDI Metadata Support

HD RP 188 and closed captioning.

### Audio Sampling

Television standard sample rate of  
 48kHz and 24-bit.

### Video Sampling

4:4:4:4

### Color Precision

10-bit

### Color Space

REC 601, REC 709

## Media

### Media

2 x SD for SD, HD and Ultra recording.

### Media Type

UHS II and able to support ProRes  
 4444 playback and 422 recording.

### Media Format

Can format discs to ExFAT (Windows/  
 Mac) or OS X Extended (Mac) file  
 systems.

## Supported Codecs

DNxHD 220x, DNxHD 145, DNxHD 45,  
 DNxHD 220x MXF, DNxHD 145 MXF,  
 DNxHD 45 MXF, DNxHR HQX, DNxHR  
 SQ, DNxHR LB, DNxHR HQX MXF,  
 DNxHR SQ MXF, DNxHR LB MXF.  
 ProRes 422 HQ QuickTime, ProRes  
 422 QuickTime, ProRes 422 LT  
 QuickTime, ProRes 422 Proxy  
 QuickTime. ProRes 4444 QuickTime in  
 HD for fill and key playback, H.264 in  
 720p and 1080p.

---

## Computer Capture

None

---

## FTP Clients

Cyberduck, Transmit, FileZilla

---

## Control

### **Built-in Control Panel**

8 buttons for menu control, 2.2 inch color display, and a rotary wheel.

### **External Control**

RS-422 deck control, SDI start/stop, timecode run. Includes Blackmagic HyperDeck SDK and Ethernet HyperDeck Control Protocol. Supports remote FTP file upload.

---

## Software

### **Software Included**

Media Express, Disk Speed Test, Blackmagic System Preferences and Blackmagic driver (Mac only).

### **Internal Software Upgrade**

Firmware built into software driver. Loaded at system start, or via updater software.

---

## Display

Built in LCD for video, audio and timecode monitoring and menu settings

2 x LED indicator lights above the SD slots.

---

## Physical Installation

1/3 rack unit size. Less than 7 inches deep.

---

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Power Requirements

### Power Supply

1x Internal 100 - 240V AC.

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (0° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)