


## DATASHEET

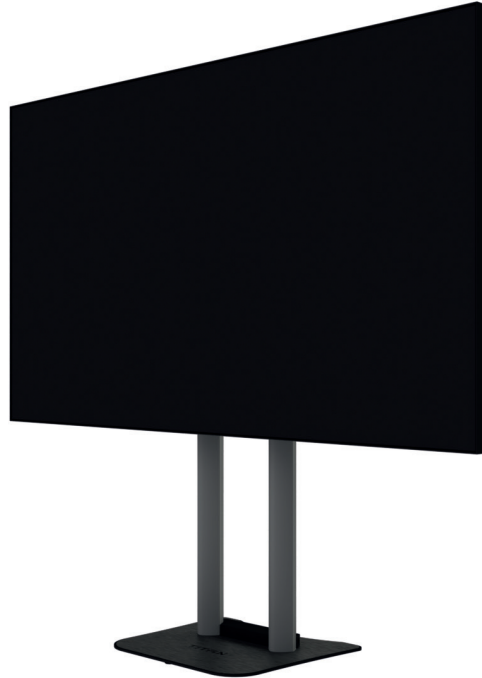

### FEATURES

- All-in-one LED single unit
- Height adjustable
- 90° rotatable
- Intuitive to handle
- Full HD (1,920 x 1,080 px)

The fLED Screen single unit is a pre-assembled plug & play LED solution. The display unit, based on INFiLED's Wallpaper series, is supplied on an electronically height-adjustable lift. This allows the unit to be put into operation in a few minutes. The lift has a rotation system, which allows the single unit to be turned into portrait mode. A wall mounting independent of the lift and a flown installation are also possible. The fLED Screen single unit combines all advantages of LED technology with the easy handling of a display.

TECHNICAL SPECIFICATIONS

Model designation	fLED Screen 136" single unit	fLED Screen 136" pro single unit	fLED Screen 136" m4 single unit
Screen diagonal	135.5"		
Pixel pitch	1.56 mm		
LED-type	SMD		IMD
Brightness	800 nit	1,000 nit	800 nit
Viewing angle	160° horizontal; 160° vertical		
Resolution	1,920 x 1,080 px		
Video input	2 x HDMI, 1 x USB		
Power consumption	Maximum: 4.5 KW Durchschnitt: 1.5 KW		
Input voltage	100 - 240 V / 50 - 60 Hz		
Maintenance	Front service		

Dimensions display

Dimensions (W x H x D)	3,018 x 1,705.5 x 104.5 mm
Aktive display area	3,000 x 1,687.5 mm
Weight	225 kg

Dimensions single unit

Dimensions landscape (W x H x D)	Minimum: 3,018 x 1,776 x 750 mm Maximum: 3,018 x 2,788 x 750 mm
Traverse path landscape	1,012 mm
Dimensions portrait (W x H x D)	Minimum: 1,706 x 3,087 x 750 mm Maximum: 1,706 x 3,439 x 750 mm
Traverse path portrait	352 mm
Weight	430 kg