


DATASHEET

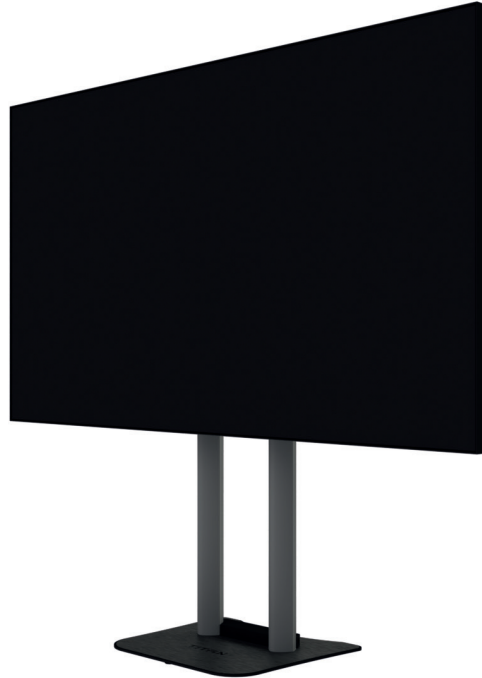

FEATURES

- All-in-one LED single unit
- Height adjustable
- 90° rotatable
- Intuitive to handle
- Full HD (1,920 x 1,080 px)

The fLED Screen single unit is a pre-assembled plug & play LED solution. The display unit, based on INFiLED's Wallpaper series, is supplied on an electronically height-adjustable lift. This allows the unit to be put into operation in a few minutes. The lift has a rotation system, which allows the single unit to be turned into portrait mode. A wall mounting independent of the lift and a flown installation are also possible. The fLED Screen single unit combines all advantages of LED technology with the easy handling of a display.

TECHNICAL SPECIFICATIONS

Model designation	fLED Screen 108" single unit	fLED Screen 108" pro single unit
Screen diagonal	108.4"	
Pixel pitch	1.25 mm	
LED-type	SMD	
Brightness	800 nit	1,000 nit
Viewing angle	160° horizontal; 160° vertical	
Resolution	1,920 x 1,080 px	
Video input	2 x HDMI, 1 x USB	
Power consumption	Maximum: 2.88 KW Average: 0.96 KW	
Input voltage	100 - 240 V / 50 - 60 Hz	
Maintenance	Front service	

Dimensions display

Dimensions (W x H x D)	2,418 x 1,368 x 104 mm
Aktive display area	2,400 x 1,350 mm
Weight	171 kg

Dimensions single unit

Dimensions landscape (W x H X D)	Minimum: 2,418 x 1,559 x 750 mm Maximum: 2,418 x 2,619 x 750 mm
Traverse path landscape	1,060 mm
Dimensions portrait (W x H X D)	Minimum: 1,368 x 2,487 x 750 mm Maximum: 1,368 x 3,139 x 750 mm
Traverse path portrait	652 mm
Weight	345 kg