

ATEM 2 M/E Advanced Panel 20



The 2 M/E model features 2 M/E rows with 20 input buttons and 2 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

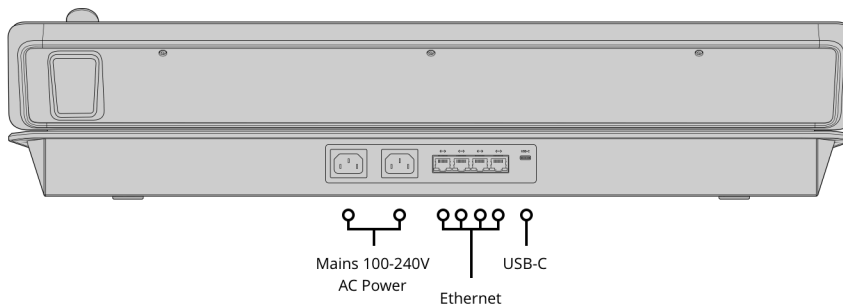

Product Specifics

Number of Mix Effects Rows 2	Crosspoint Label 6 rows 24 character LCD	Preview Transition 2
Direct Cross Points 20	On-Air indicator 8	Transition Rate Displays Via main menu
Shifted Cross Points 40	Power Status Indicators None	LCD Menu Displays 2
Crosspoint Button Type Tri-Color LED	DSK Transition Selectors 2 x Auto, Cut, Tie/Preview	Menu Control 2 x 20 buttons

Dedicated Macro Buttons

2 x 20

Source Select Bus

2

Numeric Keypad

1

Transport Control Buttons

8

Fader Bar

2

Destination Bus

2

3 Axis Joystick

1

Software**Software Applications**

ATEM Software Control Panel.

Operating SystemsMac 11.1 Big Sur,
Mac 12.0 Monterey or later.

Windows 10 and 11.

Power Requirements**Input Voltage**

2 x Internal 100 - 240V AC.

Redundant Power

Yes

Power Usage

100W

Physical Specifications

Environmental Specifications

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 60° C (-4° to 140° F)

Relative Humidity
Up to 95%
