

QSFP+ Link card

for LivePremier™ series

Ref. ACC-AQL-OUT-LINK-QSFP CARD



Field swappable Link card equipped with 6x 40GbE QSFP+ cages for LivePremier™ series




- 40GbE QSFP+ cages
- Share 8 4K60p inputs
- Share 16 2K/dual inputs
- Direct Attached Cables

Overview

The Analog Way **ACC-AQL-OUT-LINK-QSFP** is a field-interchangeable link card equipped with six 40GbE QSFP+ cages. It allows to link any **LivePremier™** live presentation switcher to any other Aquilon (any size, any type) also equipped with this card. Up to four units can be interconnected to create a ring sharing up to eight 2160p60/4K60p inputs or sixteen 2K/Dual 60Hz inputs.

Key features

- ▶ Field swappable card (not hot swappable)
- ▶ Six 40GbE QSFP+ cages (3 IN + 3 OUT)
- ▶ Allows to share up to 8x 4K60p inputs or 16x 2K/dual inputs
- ▶ Compatible with copper Direct Attached Cables up to 3m/9.8ft (ref. ACC-AQL-LINK-DAC-SET-1M and ref. ACC-AQL-LINK-DAC-SET-3M)
- ▶ Future support of Active Optical Cables (AOC)
- ▶ Future support of single-mode 40GQSFP+ modules with fibers (LC) for distances up to 2km/1,24mi
- ▶ Future support of multi-mode 40GQSFP+ modules with fibers (MTP/MPO) for distances up to 150m/490ft
- ▶ Connector status LEDs for easy troubleshooting
- ▶ Must be installed in the lowest output slot
- ▶ The OPT-RSX-LINK or OPT-AQL-LINK option must be installed first

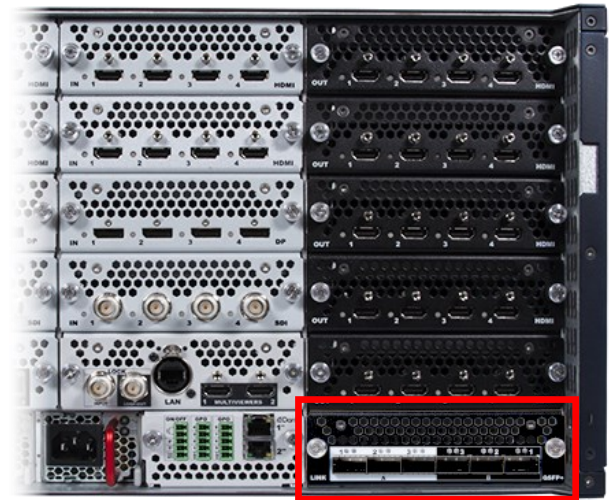

<h4>Dimensions</h4> <ul style="list-style-type: none"> ▶ W 5.10" x H 1.66" x D 5.80" ▶ L 129.7 mm x H 42.3 mm x P 147.4 mm <h4>Weight without accessories</h4> <ul style="list-style-type: none"> ▶ 0.34 kg / 0.75 lbs <h4>Shipping weight accessories included</h4> <ul style="list-style-type: none"> ▶ 0.54 kg / 1.19 lbs <h4>Operating conditions</h4> <ul style="list-style-type: none"> ▶ Temperature: 0 to 40°C (32 to 104°F) ▶ Humidity: 10% to 80%, non-condensing 	<h4>Warranty</h4> <ul style="list-style-type: none"> ▶ 3-year warranty on parts and labor back to factory ▶ Broken connectors are not covered by warranty <h4>Power supply</h4> <ul style="list-style-type: none"> ▶ Powered from LivePremier™ switcher <h4>Safety Compliance</h4> <ul style="list-style-type: none"> ▶ IEC/UL/EN 62368-1 ▶ CSA22.2#62368-1 ▶ (UL Listed E359143)
---	---

Specifications subject to change without prior notice

ACC-AQL-OUT-LINK-QFP-01/03/2024