

# combined specsheet

## Video 25 Plus



The lightweight but powerful solution for EFP / OB



### Tech Specs

- Weight: 5.7 kg
- Payload: 8 – 35 kg
- 18 counterbalance steps
- 7 horizontal and vertical grades of drag, +0
- Tilt range: +90° to -75°
- Slide range: 110 mm
- Temperature range: -40° – 60 °c
- Camera fitting: Touch & Go 16
- Head fitting: 150 mm
- Integrated flat base
- Pan bar type / number: 2, telescopic, Type Plus
- Level: Illuminated
- Adapter viewfinder extension: Standard

### Features

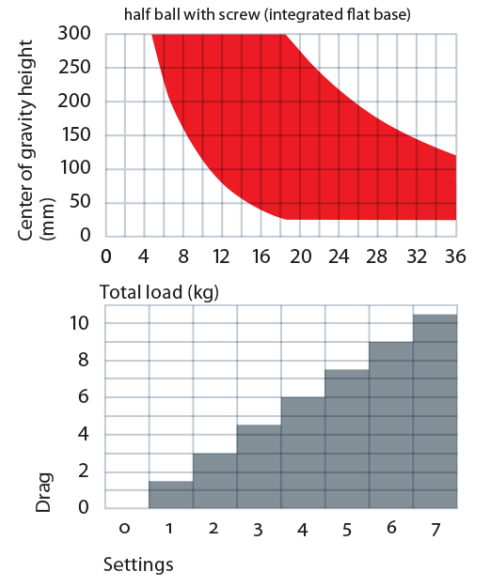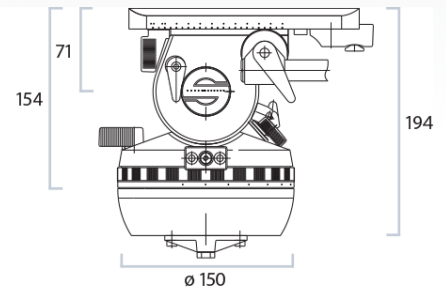

## EFP 2 CF

150 mm carbon fiber tripod



### Tech Specs

- Weight: 4,1 kg
- Payload: 0-95 kg
- Material: Carbon Fibre
- Height range: 58 – 161 cm
- Head fitting: 150 mm
- Transport length: 76 cm
- 2 stages

### Ground spreader SP 100/150



heavy duty rubber spreader, for all tripods with 100 mm and 150 mm bowl (except DA 100 K and DA 150 K, Cine)

Weight: 1,64 kg  
Payload: 95 kg  
Height: 4,5 cm  
Build Radius range: 35 – 58 cm

### Dolly S



with 100 mm / 4 in wheel diameter, for SOOM TriPod and all tripods with 100 and 150 mm bowls (except tripods DA 100 K and DA 150 K), incl. cable guards and multi-position track lock

Weight: 4,45 kg  
Payload: 95 kg  
Height: 16,0 cm  
Build Radius: 49 cm

### Touch & Go plate 16



for fluid heads DV 12, Video 15 to 25 and Video 18 Dutch

Weight: 80 g  
Width: 65 mm  
Length: 150 mm

## Video 25 Plus



**sachtler**

## EC - Declaration of Conformity EG - Konformitätserklärung

Here we declare that this product complies with the requirements of the applied directives, standards and regulations for safety and health, if used for its intended application.

This declaration becomes invalid, if any changes have been made without our agreement.

Hiermit erklären wir, dass das hier genannte Produkt aufgrund seiner Bauart in der von uns in Verkehr gebrachten Ausführung den Sicherheits- und Gesundheitsanforderungen der zugrundeliegenden hier genannten EG - Richtlinien und der genannten Normen entspricht.

Bei einer nicht mit uns abgestimmten Änderung an diesem Produkt verliert diese Erklärung ihre Gültigkeit.



**sachtler**

Product / Produkt:

**Video 25 Plus, 25 Plus FB**

Components / Komponenten:

---

Code number (s) / Codenummer(n):

2500, 2501

Year of first manufacturing / Ab Baujahr: 1999

EC - Directives: 2004/108/EG  
EG - Richtlinien:

Electromagnetic Compatibility /  
Elektromagnetische Verträglichkeit

Standards and Regulations:  
Normen und Vorschriften:

EN 55103-1:2006-07  
EN 55103-2:2006-07

Inspector / Prüfstelle:

Vitec Videocom GmbH

Date of Inspection / Prüfdatum:

2010-06

Eching, 08.11.2012

Alan Platt  
R&D Director



Vitec Videocom GmbH  
Headquarters  
Erfurter Straße 16  
85386 Eching  
Germany

T +49 89 321 58 200  
F +49 89 321 58 227  
info@vitecvideocom.com  
www.vitecvideocom.com

Bags  
Petrol Bags  
Camera accessories  
OConnor  
Equipment rentals UK  
The Camera Store  
Lighting  
Anton/Bauer  
Litepanels  
Sachtler  
Mobile power  
Anton/Bauer  
Promoters  
Autoscript  
Supports -  
OConnor  
Sachtler  
Vinten  
Vinten Radamec

---

## 4 Technical specifications

### 4.1 General data

Counterbalance:	18 steps (depends on COG of the camera)
Balance plate:	110 mm ( Video 25 Plus)
Grades of drag:	horizontal, and vertically 7 each and 0
Tilt angle:	+90° / -75°
Panning range:	360°
Temperature range:	-40°C (-40°F) to 60°C (140°F)
Weight:	5.7 kg (12.6 lb)
Max. load:	35 kg (77 lb)
Camera fitting:	Touch & Go system
Tripod / Pedestal fitting:	150 mm bowl / flat base
Pan bar:	telescopic with attachment diameter of 18/22/32 mm (0.7/0.9/1.3 in), length 350 to 520 mm (13.8 - 20.5 in)
Batteries:	3 each 625 U or LR9

## 4.2 Dimensions

