




Cable Datasheet

opticalCON® MTP® & SPLIT

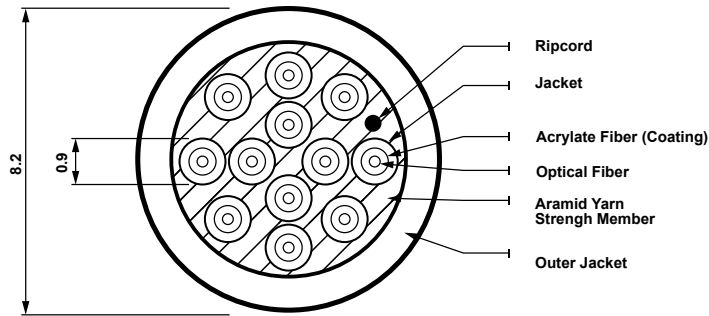

Technical Data Cables

Number of Fibers	12	12			
Fiber Type	Multimode	Single-mode			
Fiber standard	OM3	G.657A			
Core Diameter	50 µm	9 µm			
Cladding Diameter	125 µm	124.8 µm			
Primary Coating Diameter	280 µm	280 µm			
Secondary Buffer Diameter	900 µm	900 µm			
Numerical Aperture	0.20 µm	-			
Proof Test Level	100 kpsi	100 kpsi			
Wavelength	850 nm	1300 nm	1310 nm	1550 nm	1625 nm
Gigabit Ethernet Distance	1000 m	550 m	-	-	-
Attenuation	2.5 dB/km	0.6 dB/km	0.35 dB/km	0.21 dB/km	0.24 db/km
Bandwidth	1500 MHz-km	500 MHz-km	-	-	-
Nominal Dispersion Slope	-	-	0.092 ps/(nm ² -km)	-	-
Refraction index	1.480	1.479	1.467	1.468	-
Cable Surface	Black Matt	Black Matt			
Jacket material	Polyurethane	Polyurethane			
Cable Weight	103 kg/km	103 kg/km			
Cable Diameter	8.2 mm	8.2 mm			
Installation:					
Max. Tensile Load	1030 N	1030 N			
Min. Bend Radius	8.2 cm	8.2 cm			
Operation:					
Max. Tensile Load	1030 N	1030 N			
Min. Bend Radius	8.2 cm	8.2 cm			
Impact Resistance	-	-			
Crush Resistance	30 N/cm	30 N/cm			
Number of Conductors	-	-			
Nominal Core OD	-	-			
Conductor resistance	-	-			
Operation Temperature	-40°C to +85°C	-40°C to +85°C			
Storage Temperature	-55°C to +85°C	-55°C to +85°C			
Bend optimized	Yes	Yes			
Laser optimized	Yes	No			

Data subject to change without prior notice. © 2016 NEUTRIK®. NEUTRIK® are registered trademarks of NEUTRIK AG. ALL RIGHTS RESERVED.